

Mini CO₂TM

Features

- Low power consumption
- Compact size
- Optional internal or external battery power
- Easy integration
- Large selection of concentration ranges
- Digital option comes with internal data logger and controller with 2GB flash memory

pCO₂ Sensor Applications

- Aquaculture monitoring of dissolved CO₂ for fish and shellfish health
- Coastal zone CO₂ fluxes
- Algae to fuel bioreactor feedback control
- Groundwater and wellwater monitoring
- Carbon budget studies for lakes and rivers
- Carbon capture storage monitoring of aquifer and surface water levels of pCO₂
- Wastewater greenhouse gas emissions
- Ocean glider and profiler missions


Mini CO₂ Submersible pCO₂ Sensor

The Mini CO₂TM instrument uses infrared detection to measure the partial pressure of CO₂ gas dissolved in liquids. With pCO₂ ranges from 0-1000 ppm up to 0-100%, the Mini CO₂ provides the versatility needed for any application.

Mini CO₂TM submersible instruments are compact, lightweight, plug and play sensors. The instrument also measures total dissolved gas pressure (TDGP), a useful parameter for many applications and data correction.

With housing options rated to 6000 dbar of hydrostatic pressure, and resistance to most corrosive liquids, the Mini CO₂ can provide reliable dissolved carbon dioxide data for many applications. Flow-through and in-line adapters are also available for simple and effective industrial solutions.

For specialized applications, Pro-Oceanus can provide custom solutions to suit any need.

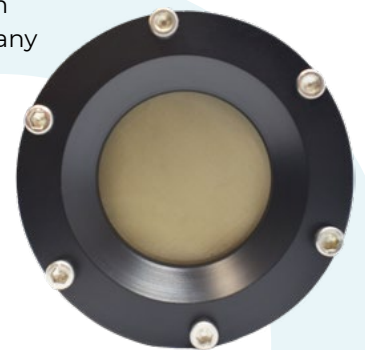

PRO OCEANUS Stability in a sea of change.

Mini CO₂™

Sensor Specifications

Sensor Performance

CO₂ Measurement Ranges 0-2000 ppm CO₂; by volume
*other ranges available 0-5000 ppm
0-1% (10,000 ppm)
0-100%

Total Dissolved Gas Pressure 0-2 bar

Accuracy:

pCO₂ ± 2% of max range

TDGP ± 1%

Equilibration rate (t₆₃) 3 minutes

Resolution 0.1% of max range

Physical

Length 28 cm (11 in)

Diameter 5.3 cm (2.1 in)

Weight Air: 0.53 kg (1.2 lbs)
Water: -0.06 kg (-0.1 lbs)

Housing Material Acetal Plastic / Titanium

Depth Rating 0 - 600 m (Plastic)
Up to 6000 m (Titanium)

Water Temperature 0° to 40° C

Electrical

Input voltage digital: 7 - 24 VDC
analog: 12 - 24 VDC

Power consumption 85 mW (7 mA @ 12 V)

Data output digital: RS-232, ASCII CSV
analog: 0-5 V or 4-20mA

Sample rate 2 seconds (variable rate with logger/controller)

Optional Accessories

Titanium housings

Rated up to 6000 m depth

Internal battery power

External battery pack

19, 76 or 134 Amp-hour capacity

Water-pumped head

Reduce biofouling and improve response rate

Mooring cage or frame with instrument brackets

Pigtail Cables with Locking Sleeves

5, 10, 25, 50 meters, or longer



Water-Pumped Head Accessory



Pigtail Cable with Locking Sleeve



Copper Antifouling Shield



Instrument and Battery Mooring Bracket

PRO Stability in a sea of change.
OCEANUS